







Purlin cladding

	Description	REF. WHITE	RÉF. SAND	RÉF. BLACK	COND.
PURLIN CLADDING BELRIV® NICOLL					
 CPAN805B	Purlin cladding 80x225, length 500	CPAN805B			10
			CPAN805S	CPAN805N	
 CPAN1006B	Double purlin cladding 80x225, length 1000	CPAN810B			8
			CPAN810S	CPAN810N	
	Purlin cladding 100x225, length 600	CPAN1006B			8
			CPAN1006S	CPAN1006N	
	Double purlin cladding 100x225, length 1200	CPAN1012B			6
			CPAN1012S	CPAN1012N	
STAINLESS STEEL NAILS					
Box of 100 stainless steel nails					
	with PVC head length 30 mm	CI30B	CI30S	CI30N	B100*
	with PVC head length 40 mm	CI40B	CI40S	CI40N	B100*
	with PVC head length 65 mm	CI65B	CI65S	CI65N	B100*
<small>*Not available in smaller quantities</small>					
	Set of 6 spacers 3 mm thick (black)	CAL63BELRIV			50

ISO 9001
ISO 14001
BUREAU VERITAS
Certification



BUILDING - SANITARY - ENVIRONMENT

Head office and factories : 37, rue Pierre & Marie Curie - BP 10966 - 49309 CHOLET Cedex // Tél. 02 41 63 73 83 - Fax 02 41 63 73 84

Documentation request : info@nicoll.fr // Technical information : tech-com.nicoll@alixis.com

SAS (simplified joint stock company) with capital of 7 683 431 € - 060 200 128 RCS Angers

an *Aliaxis* company

Purlin cladding

Belriv[®] by 

NEW



BUILDING
SANITARY
ENVIRONMENT



BUILDING - SANITARY - ENVIRONMENT




Purlin cladding

Belriv® by Nicoll

Roof spilling out cladding and protection

A perfect complement to the Belriv System and Belriv Tradi ranges, Nicoll's range of Belriv purlin cladding provides lasting protection for exposed end-wall roof timber components.

Perfect for renovation of rooflines, this range enables the traditional appearance of the roof timbers to be maintained while avoiding the need for tedious maintenance.

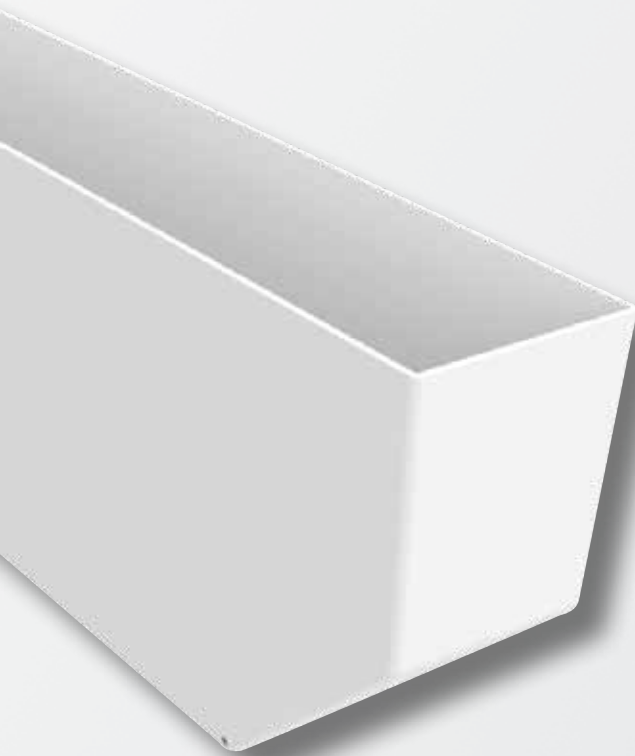


Advantages :

- Purlin cladding
- Lasting protection of roof timber components
- No need for maintenance, paint or protective coating
- Excellent UV resistance for long-lasting colours
- Resistant to frost and bad weather
- 3 colours : white, sand and black



Characteristics et installation

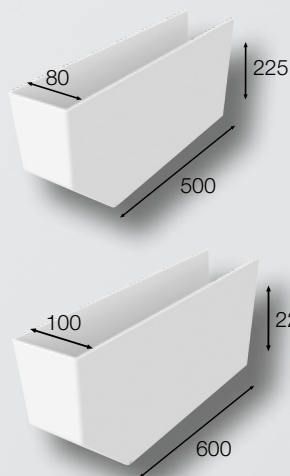

PURLIN CLADDING BELRIV®

- 2 widths to choose from: 80 mm or 100 mm
- Height 225 mm
- Traditional shape: 45° bevel
- Quick to install with 3 PVC-capped stainless steel nails
- 2 holes on cladding face for ventilation and elimination of humidity
- 3 colours available

white

sand

black



INSTALLATION

After measuring the dimensions of the purlin, cut out the Nicoll purlin cladding. This can be done easily enough with a saw or metal shears.



Next, position the cladding on the purlin and secure the end piece with a PVC-capped stainless steel overmoulded nail of the same colour as the piece (see page 4 for the list of products).



Complete the installation by fastening 1 nail at the top part on each side of the purlin cladding. If necessary, use Nicoll spacers.



Finally, cover the end-wall with Nicoll's Belriv soffit board.