


Connecto[®] New grating for swimming-pool and pedestrian applications

Building

NEW

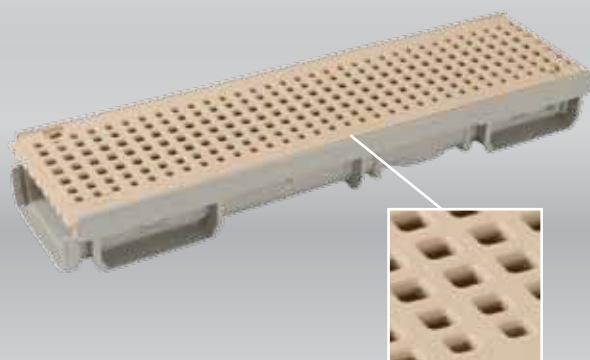

Nicoll is offering a new swimming-pool / pedestrian grating with an updated design to match perfectly with your environment.


Advantages :

- New design
- Non-skid
- Ideal for bare feet traffic
- Durable
- Controlled expansion of the gratings
- Lockable (optional)



Connecto® grating for swimming-pool and pedestrian applications

Building



PVC GRATING FOR CAN177 - CAB773 - CABS773

	REF. LIGHT GREY	REF. SAND	REF. WHITE	PACKAGING	PACKAGING
Swimming-pool and pedestrian grating length 0.5m A15	GR77P	GR77PS	GR77PB		12
Set of 1 screw and 1 insert for fastening Price for 1 set - Must be ordered by 12 sets	FIXCAN			S12	

SHALLOW PVC DRAINAGE CHANNELS LENGTH 0.5M (WITH PVC RABBET) WITH BUILT-IN GRATINGS

	RÉF.	PACKAGING
Drainage channel length 0.5m with PVC rabbet with 1 PVC light grey built-in swimming-pool grating A15 to be solvent cemented	CAB510APG	Sold only in pallets of 63 elements invoiced per 0.5m element
Pallet of 63 elements 0.5m (delivery unit)	PAB510APG	
Drainage channel length 0.5m with PVC rabbet with 1 PVC light sand built-in swimming-pool grating A15 to be solvent cemented	CAB510APS	Sold only in pallets of 63 elements invoiced per 0.5m element
Pallet of 63 elements 0.5m (delivery unit)	PAB510APS	

The rates mentioned in this document presuppose the application of Nicoll's General Terms of Sale printed in our Price List - Catalogue 2012.

USE

Nicoll's new swimming-pool / pedestrian grating is intended for all applications around the swimming-pool, terrace and balcony, but also communal showers, sports complexes, locker rooms, etc.

It is suitable for Connecto drainage channel bodies CAN 177, CAB733, and CABS773.

ADVANTAGES

- **Aesthetically pleasing** : available in grey, sand or white, the new swimming pool / pedestrian gratings match perfectly with the environment of the pool, balcony and terrace, thanks to its new design.
- **Non-skid** : the texture of the grating prevents slips and falls.
- **Ideal for bare feet traffic** : the hole openings in the grating are less than 8mm, providing complete safety for bare feet, in accordance with standard EN1253-1.
- **Durable** : the grating resists to the chemical agents (chlorine, salt, soap, etc.), corrosion. Made from anti-UV treated PVC, the grating keeps its colour over time.
- **Lockable** : to lock the grating, simply uncap the screw passages and use the FIXCAN fastening kits (optional).
- **Controlled expansion of the grating** : positioning brackets make it possible to integrate the grating correctly into the body of the drain, so as to create the space needed for the proper expansion of the grids.

TECHNICAL CHARACTERISTICS

- Anti-UV treated PVC grating.
- Dimensions (L x l x h in mm) = 500 x 128 x 20.
- Resistance class A15 (NF EN 1433) : for areas used by pedestrians or cyclists.
- Hole openings less than 8 mm.

